

plūme

Office 180

COLLECTION 2019-2021
LIGHTWEIGHT PVC FREE FABRIC
100% POLYESTER
OF = 6%



**We are delighted
to present our
new lightweight
pvc free fabric.
Say hello to Plume.**







Plume Office 180



Technical specifications

TECHNICAL SPECIFICATION		UNITY		STANDARD	RESULT
composition				Polyester 100%	
openness factor		%		NBN EN 14500-B1	6%
weight		g/m ²		NF EN 12127	160
thickness		mm		ISO 2286-3	0,35
density		yarn/cm	warp	ISO 7211/2	33
			weft		24
colour fastness to artificial light				ISO 105 B02	>6
tear strength	original	daN	warp	ISO 4674-1B	2
			weft		0,9
elongation up to break	original	%	warp	ISO 1421-2	16,8
			weft		14,4
breaking strength	original	daN	warp	ISO 1421-2	19,7
			weft		87,5
tear strength	after climatic chamber -30°C	daN	warp	ISO 4674-1B	1,7
			weft		0,9
elongation up to break	after climatic chamber -30°C	%	warp	ISO 1421-2	18,4
			weft		14,3
breaking strength	after climatic chamber -30°C	daN	warp	ISO 1421-2	21,8
			weft		89,4
tear strength	after climatic chamber +70°C	daN	warp	ISO 4674-1B	1,8
			weft		0,8
elongation up to break	after climatic chamber +70°C	%	warp	ISO 1421-2	19,3
			weft		14,6
breaking strength	after climatic chamber +70°C	daN	warp	ISO 1421-2	23,3
			weft		86,4
fire classification	Europe			UNE-EN 13501-1:2007	C-s3,d0
	France			NF P92-503	M2
	Germany			DIN 4102	B1
	Spain			UNE EN 13773-2003	Clase 1
roll length	40 m				
confection cut	cold slit, high frequency or laser cut				
confection welding	by heat, high frequency or ultrasonic welding with reinforce tape				

These properties are given as indicative and don't have any contractual value





POLYESTER

OF = 6%

Plume Office 180 002010 white | charcoal







Plume Office 180




Colours & references

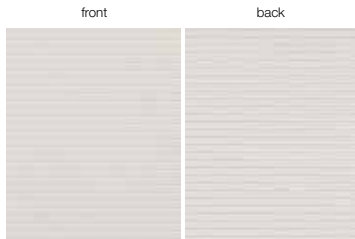


Plume Office 180 002002 white | white

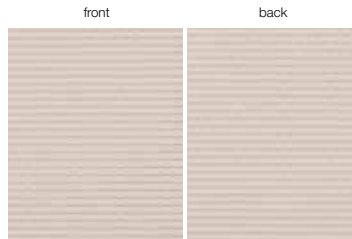

Plume Office 180 002008 white | linen

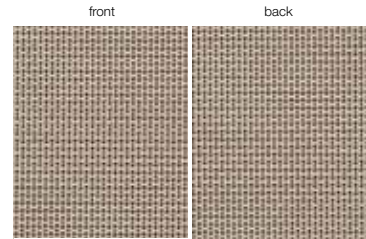


Plume Office 180 008010 linen | charcoal

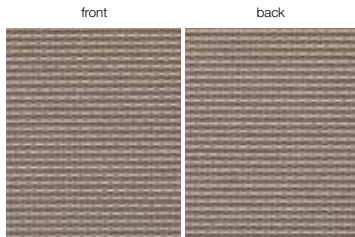


Plume Office 180 011008 bronze | linen




Plume Office 180 002007 white | pearl grey

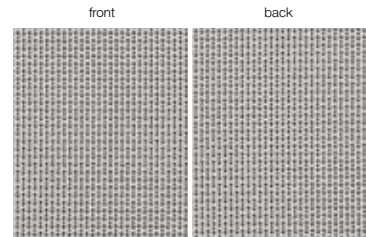

Plume Office 180 002010 white | charcoal

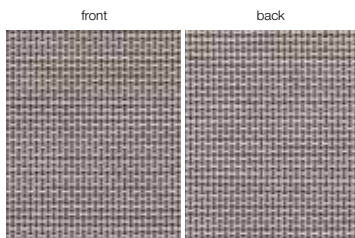

Plume Office 180 007010 pearl grey | charcoal

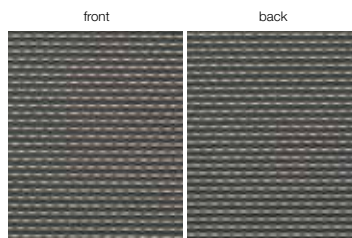

Plume Office 180 010002 charcoal | white

Plume Office 180	280 cm
002002 white white	•
002008 white linen	•
008010 linen charcoal	•
011008 bronze linen	•
002007 white pearl grey	•
002010 white charcoal	•
007010 pearl grey charcoal	•
010002 charcoal white	•


Solar energetic properties

Plume Office 180 European Standard EN14501 - EN410 Calculation G-value according to EN 13363-1, version 7.0				SOLAR ENERGETIC PROPERTIES								VISUAL PROPERTIES	
				FABRIC			FABRIC + GLAZING						
							INTERIOR						
							G-factor = total solar energy transmittance						
references	colours	front	back	As = Solar Absorbance %	Rs = Solar Reflectance %	Ts = Solar Transmittance %	Glazing A - Gv = 0,85 - U = 5,8	Glazing B - Gv = 0,76 - U = 2,9	Glazing C - Gv = 0,59 - U = 1,2	Glazing D - Gv = 0,32 - U = 1,1	Tv = Visible Light Transmittance %	Tuv = UV Transmittance %	
002002	white white	front		front	3,100	59,900	37,000	0,411	0,411	0,380	0,258	35,400	32,300
		back		back	2,900	60,100	37,000	0,411	0,411	0,380	0,258	35,400	32,300
002008	white linen	front		front	11,800	55,600	32,600	0,424	0,426	0,392	0,261	29,500	13,300
		back		back	11,900	55,500	32,600	0,424	0,426	0,392	0,261	29,500	13,300
008010	linen charcoal	front		front	44,400	36,500	19,100	0,494	0,502	0,447	0,274	15,800	9,500
		back		back	44,700	36,200	19,100	0,494	0,502	0,447	0,274	15,800	9,500
011008	bronze linen	front		front	33,100	41,000	25,900	0,485	0,488	0,435	0,272	13,900	10,800
		back		back	32,700	41,400	25,900	0,485	0,488	0,435	0,272	13,900	10,800
002007	white pearl grey	front		front	23,300	48,900	27,800	0,448	0,453	0,411	0,266	18,100	11,600
		back		back	23,300	48,900	27,800	0,448	0,453	0,411	0,266	18,100	11,600
002010	white charcoal	front		front	35,700	42,200	22,100	0,471	0,479	0,430	0,270	20,800	19,300
		back		back	36,000	41,900	22,100	0,471	0,479	0,430	0,270	20,800	19,300
007010	pearl grey charcoal	front		front	46,800	34,900	18,300	0,501	0,509	0,451	0,276	13,400	9,000
		back		back	46,200	35,500	18,300	0,501	0,509	0,451	0,276	13,400	9,000
010002	charcoal white	front		front	38,800	37,300	23,900	0,500	0,504	0,446	0,275	10,400	9,400
		back		back	38,800	37,300	23,900	0,500	0,504	0,446	0,275	10,400	9,400

Working of a sunscreen

Sunscreen = protection against sunrays

Sunscreen means protection against the sunrays, so the function is the protection against light and heat, which is expressed in several properties.

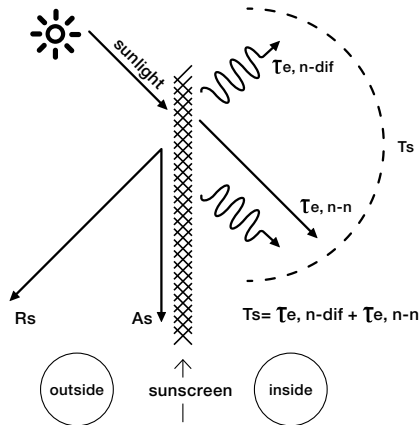

Rs	Solar reflectance
As	Solar absorptance
Ts	Solar transmittance
Te, n-dif	Diffuse solar transmittance
Te, n-n	Normal solar transmittance

Classes indicate effect of a sunscreen


Based on certain properties, the screen can be split up in classes, from 0 to 4. Those classes are used, starting from the norm EN 14501, to indicate the effect of a certain sunscreen.

influence on thermal and visual comfort	
Class 0	very little effect
Class 1	little effect
Class 2	moderate effect
Class 3	good effect
Class 4	very good effect

Visual properties

Openness factor

The openness of a screen is indicated by the openness factor = **OF**. The openness coefficient is the relative area of the openings in the fabric seen under a given incidence. The openness factor is seen under a normal incidence.

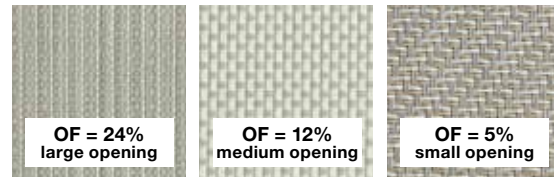

The sunrays are subdivided in: **Visible light**, **UV-light** and **IR-light**.

Visible light (55% of the sun-energy) is that part for which our eyes are most sensitive. How larger the light intensity, how more detrimental for our eyes.

The factor Visible Light Transmittance = **Tv**, is the ratio of visible light that will be transmitted. How lower this factor can be kept, how better for the eyes.

UV-light (3% of the sun-energy) is the part of radiation which is detrimental for our health. This factor is indicated by the UV Transmittance = **Tuv**. This is the quantity UV-light transmitted by the sunscreen.

IR-light is invisible. This is however 42% of the sun-energy. These rays care for the reheating of solid substances and gases.

Influence of colours

The choice of the colour has direct influence on the criteria which justify the use of sunscreen protection:

- Protection against visible light, expressed by the factor **Tv**.
- Protection against sun-energy, expressed by the **G** value.
- Protection against secondary heat, expressed by the factor **Qi**.
- Protection against UV-light, expressed by the factor **Tuv**.



Visual properties: classes

Glare control

The capacity of the solar protection device to control the luminance level of openings and to reduce the luminance contrasts between different zones within the field.

$T_{v,n-n}$	$T_{v,n-dif}$			
	$T_{v,n-dif} < 0,02$	$0,02 \leq T_{v,n-dif} < 0,04$	$0,04 \leq T_{v,n-dif} < 0,08$	$T_{v,n-dif} \geq 0,08$
$T_{v,n-n} > 0,10$	0	0	0	0
$0,05 < T_{v,n-n} \leq 0,10$	1	1	0	0
$T_{v,n-n} \leq 0,05$	3	2	1	1
$T_{v,n-n} = 0,00$	4	3	2	2

Privacy at night

Night privacy is the capacity of an internal or external blind or a shutter in the fully extended position or fully extended and closed position to protect persons, at night in normal light conditions from external view. External views means the ability of an external observer located 5m from the fully extended and closed product, to distinguish a person or object standing 1m behind the protection device in the room.

$T_{v,n-n}$	$T_{v,n-dif}$		
	$0 < T_{v,n-dif} \leq 0,04$	$0,04 < T_{v,n-dif} \leq 0,15$	$T_{v,n-dif} > 0,15$
$T_{v,n-n} > 0,10$	0	0	0
$0,05 < T_{v,n-n} \leq 0,10$	1	1	1
$T_{v,n-n} \leq 0,05$	2	2	2
$T_{v,n-n} = 0,00$	4	3	2

Visual contact with the outside

Visual contact with the outside is the capacity of the solar protection device to allow an exterior view when it is fully extended. This function is affected by different light conditions during the day.

$T_{v,n-n}$	$T_{v,n-dif}$		
	$0 < T_{v,n-dif} \leq 0,04$	$0,04 < T_{v,n-dif} \leq 0,15$	$T_{v,n-dif} > 0,15$
$T_{v,n-n} > 0,10$	4	3	2
$0,05 < T_{v,n-n} \leq 0,10$	3	2	1
$T_{v,n-n} \leq 0,05$	2	1	0
$T_{v,n-n} = 0,00$	0	0	0

Daylight utilisation

Daylight utilisation is characterised by:

- the capacity of the solar protection device to reduce the time period during the artificial light is required.
- the capacity of the solar protection device to optimise the daylight which is available.




CLASS	0	1	2	3	4
$T_{v,dif-h}$	$T_{v,dif-h} < 0,02$	$0,02 \leq T_{v,dif-h} < 0,10$	$0,10 \leq T_{v,dif-h} < 0,25$	$0,25 \leq T_{v,dif-h} < 0,40$	$T_{v,dif-h} \geq 0,40$

Working of a sunscreen


Thermal comfort

Fabric

Energy radiated by the sun, will be split up in 3 factors:

factor 1:	factor 2:	factor 3:
 <p>As = Solar absorptance is the ratio of the absorbed flux to the incident flux.</p>	 <p>Rs = Solar reflectance is the fraction of the incident solar radiation that is directly reflected by the component.</p>	 <p>Ts = Solar transmittance is the sum of the (normal) direct solar transmittance and the diffuse solar transmittance. This is the fraction of the total transmitted energy to the total incident solar radiation.</p>
These 3 factors together are always 100%		

The G-factor

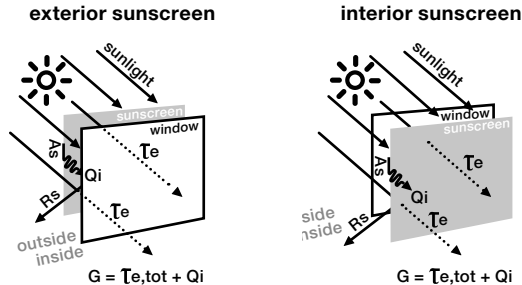

Rs	Solar reflectance
As	Solar absorptance
Te	Direct solar transmittance
Qi	Secondary heat transfer factor
G	G-factor = total solar energy transmittance

Sunscreens are always used in combination with a glazing. These together will prevent a large quantity of energy, sent by the sun to the earth, which is indicated by the: Total Solar Energy Transmittance, or **G-factor**.

The **G** value is the ratio between the total solar energy transmitted into a room through a window and the incident solar energy on the window. The **G_{tot}** is the solar factor of the combination of glazing and solar protection device.

The **G_v** is the solar factor of the glazing alone.

The shading coefficient is defined as the ratio of the solar factor of the combined glazing and solar protection device **G_{tot}** to that of the glazing alone **G_v**.

The total solar energy transmitted through a window consists of two parts:

- 1) Radiation: measured by the solar transmittance: **Te,tot**
- 2) Heat: measured by the secondary heat transfer: **Qi**

$$G = Te,tot + Qi$$


The factor **Te,tot**, is the quantity of energy, which will pass the combination solar protection device and window.

The factor **Qi** is the quantity of heat which is released by the absorption of energy in the sunscreen protection system = combination sunscreen + glazing.


The **G-factor** is the most important factor to explain the efficiency of a combination sunscreen + glazing, as protection against the energy of the sun. The **G-factor** divided into his components explains the difference in efficiency between exterior and interior sunscreen.

$$G = Te,tot + Qi$$

exterior sunscreen



interior sunscreen



The direct solar transmittance **Te,tot** is the same for interior and exterior use of sunscreens.

The secondary heat factor **Qi** for interior sunscreen is bigger then for exterior sunscreen. For interior use, the heat, produced by the absorption of energy, will be transmitted to the room inside. By exterior use, the heat will be transmitted to the outside, without any inconvenience at the inside.

Also the colour of the sunscreen has an influence on the **G-factor**. Dark colours will absorb a lot of sun energy and will transmit this to heat. If the screen is used for exterior, heat will have no influence inside the room, contrary to a screen used for interior. This is why a darker screen is ideal for exterior use and a lighter screen for interior use.



Thermal comfort: classes

Total Solar energy Transmittance = G-factor

CLASS	0	1	2	3	4
Gtot	$G_{tot} \geq 0,50$	$0,35 \leq G_{tot} < 0,50$	$0,15 \leq G_{tot} < 0,35$	$0,10 \leq G_{tot} < 0,15$	$G_{tot} < 0,10$

Secondary Heat transfer = Qi

CLASS	0	1	2	3	4
Qi	$Qi \geq 0,30$	$0,20 \leq Qi < 0,30$	$0,10 \leq Qi < 0,20$	$0,03 \leq Qi < 0,10$	$Qi < 0,03$

Normal Solar transmittance = protection against direct transmission

The ability of a solar protection device to protect persons and surroundings from direct irradiation is measured by the direct/direct solar transmittance of the device in combination with the glazing. **Te,n-n** is used as measure for this property.



Screen Protectors SL · c/ Alessandro Volta Nau 6A-7^a · Pol. Ind. Plans d'Arau
08787 La Pobla de Claramunt, Barcelona · T +34 93 8088004 · screen@screenprotectors.com · www.copaco.be